


Directional Flasher (800092) Installation

Item #	JDP Part #	Description	Qty
1	100903	Amber Lights W/Bullets	4
2	101752	Dual Rate Flasher W/Butyl Tape	1
3	100901	Rocker Switch On/Off	1
4	100410	Rocker Switch On/Off/On	1
5	100467	Hazard Harness	1
6	100135	20 Amp Fuse	1

1. Verify that all parts listed above match what was received.
2. Locate the bolts on top of the roof. Remove bolts. Remove roof from cab.
3. Locate light locations on all 4 corners of roof liner (Hole locations are marked on the top of the roof liner). Drill 1/2" holes. Install *Amber Lights W/Bullets* (1).
4. Locate the switch-plate with the hazard and directional symbols on it (See Figure 1) and cut the decal to accommodate switches
5. Locate Fuse-Box and Ground-Post. See Page 2 Figure 2.
6. **Note:** Follow step 7 only if the cab has a strobe light. Without a strobe light go to step 8.
7. Remove existing hazard switch and replace with the *Rocker Switch On/Off* (3) included in the kit.
8. Install *Rocker Switch On/Off/On* (4) and *Rocker Switch On/Off* (3). See page 2 Figure 2.
9. Layout the wire harness in the roof-liner. **CAUTION: wires should not interfere with any moving parts or sharp objects.**
10. See page 2 Figure 3 for wiring instructions.
11. Insert *20 Amp Fuse* (6).
12. Re-install roof.

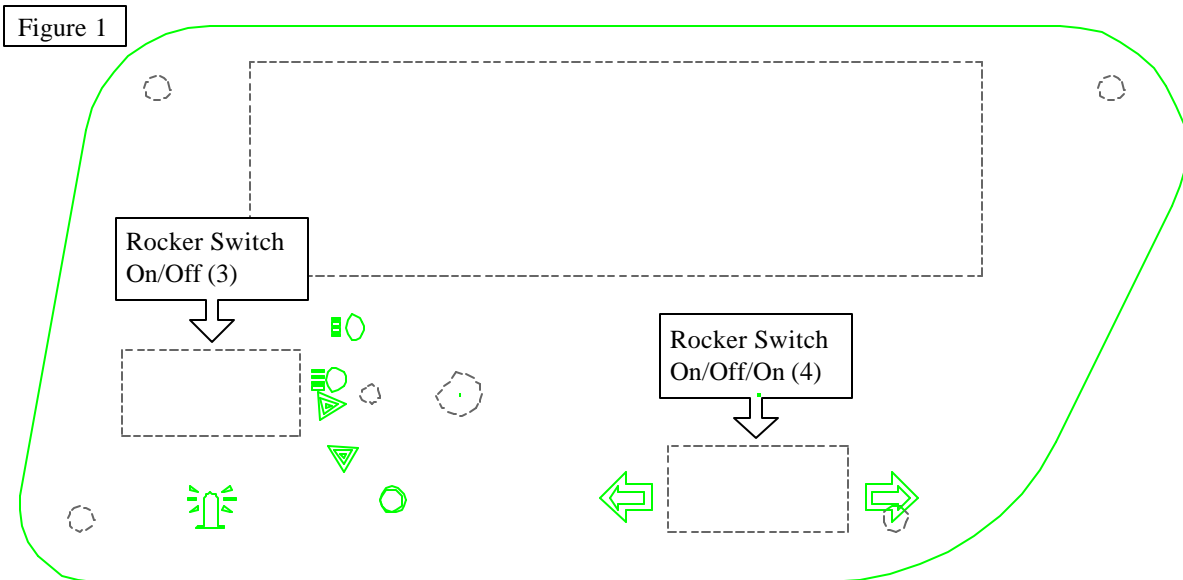

Directional Flasher (800092) Installation

