


## Work Lights (800091) Installation

Item #	JDP Part #	Description	Qty
1	100731	Halogen Lights	3
2	100901	Rocker Switch On/Off	2
3	100135	Fuses	2
4	100465	Work-Light Harness Front	1
5	100466	Work-Light Harness Rear	1


1. Verify that all parts listed above match what was received.
2. Locate the bolts on top of the roof. Remove bolts. Remove roof from cab.
3. Locate switch-plate, cut decal to accommodate switches and install switches. See Figure 1.

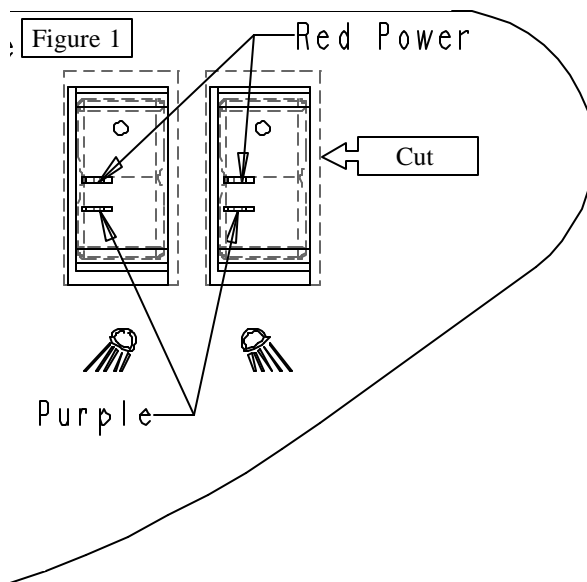

4. Locate the holes on the roof-liner for the front lights. Remove the plugs and install the lights.
5. Drill a 1/2" hole in the roof-liner for the rear light. **CAUTION: make sure that there are no wires or hoses that will interfere with drilling.** See Figure 2 for recommended location.



6. Layout the wire harnesses in the roof-liner. **CAUTION: wires should not interfere with any moving parts or sharp objects.**
7. Connect power wires to fuse pig-tails. See Figure 3 for fuse-box location. See label inside of cover for proper fuse location. Insert fuses (3).

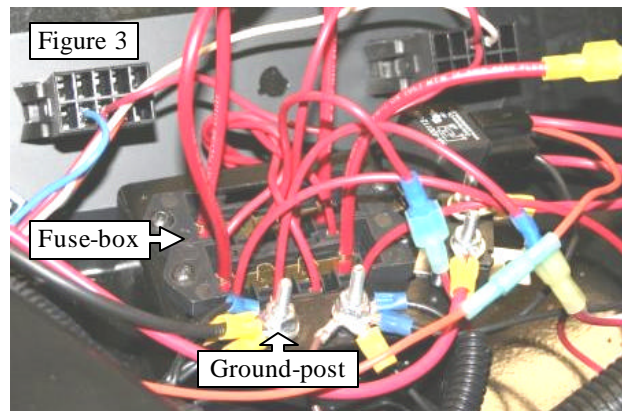

8. Connect front harness to front lights and switch.
9. Connect rear harness to rear light and switch.
10. Screw ground wires onto ground-post. See Figure 3 for ground-post location.
11. Re-install roof.